

SPOKANE INDUSTRIES, INC.

SPOKANE METAL PRODUCTS DIVISION

Spokane Washington

CONFIDENTIAL PROPRIETARY INFORMATION

Reproductions of this data or the manufacturing of products from
This data by anyone other than Spokane Industries, inc. of Spokane
Washington is strictly prohibited without written consent.

500 GALLON

VACUUM FUEL BOWSER

TECHNICAL MANUAL

PARTS, OPERATION AND MAINTENANCE

MODEL NUMBER: BOW 500-01-FV

**© COPYRIGHT 2000 By SPOKANE INDUSTRIES INC.
ALL RIGHTS RESERVED**

This document discloses subject matter in which Spokane Industries, Inc has Proprietary rights and such subject matter shall not, without the written permission of Spokane Industries, Inc., be either (A) used, released or disclosed in whole or in part outside the government, (B) used in whole or in part by the government, for manufacture, or (C) used by a party other than the government, except for (1) emergency repair or overhaul work only, by or for the government, where the item or process concerned is not otherwise reasonably available to enable timely performance of the work, provided that release of disclosure hereof outside the government shall be made subject to a prohibition against further use, release of disclosure, or (2) release to a foreign government, or for emergency repair or overhaul work by or for such government under the conditions of (1) above. This legend shall be marked on any reproduction hereof in whole or in part.

Spokane Industries, Inc.
Spokane Metal Products Division
P.O. Box 3303
Spokane, WA 99220-3303
Telephone: (509) 928-0720
Tele Fax: (509) 927-0826
Email: dyorke@spokaneindustries.com

500 GALLON VACUUM FUEL BOWSER

TECHNICAL MANUAL PARTS, OPERATION AND MAINTENANCE MODEL NUMBER: BOW 500-01-FV

INDEX

		<u>PAGE</u>
<u>Section 1.</u>	Introduction	1
<u>Section 2</u>	Safety	1
<u>Section 3</u>	Operation	
	3.1 Intended Use	3
	3.2 Tow Bar and Under Carriage	3
	3.3 Parking Brake	4
	3.4 Manway	4
	3.5 Reserved for future use	--
	3.6 Sample Port (Not Provided).....	4
	3.7 Grounding	4
	3.8 Drain Valve	5
	3.9 Reserved for future use	--
	3.10 Reserved for future use	--
	3.11 Vacuum Assembly	6
	3.12 Vacuum Governor	6
<u>Section 4</u>	Maintenance	
	4.1 Tow Bar and Under Carriage	7
	4.2 Parking Brake	7
	4.3 Manway	8
	4.4 Reserved for future use	--
	4.5 Reserved for future use	--
	4.6 Grounding.....	8
	4.7 Telescoping Drain Assembly (Not Supplied)	8
	4.8 Telescoping Drain Sump (Not Supplied)	9
	4.9 Vacuum Assembly	9
	4.10 Vacuum Governor	10
	4.11 Reserved for future use	--
	4.12 Trouble Shooting	11

INDEX

<u>Section 5</u>	Replacement Parts	11
	Assembly Tank	12
5.1	Main Tank	13
5.2.1	Front Axle Assembly	14
5.2.2	Rear Axle Assembly	16
5.2.3	Parking Brake Assembly	17
5.2.4	Front Wheel Assembly	21
5.2.5	Rear Wheel Assembly	24
5.3	Manway Assembly	27
5.4	Decal Package	28
5.5	Telescoping Drain Assembly (Not Supplied)	29
5.5.1	Telescoping Drain Sump w/Stopper Assembly (Not Supl)	31
5.6	Vacuum Assembly	32
5.6.1	Vacuum Governor Assembly	35
5.7	Miscellaneous Fixtures	36
5.8	Reserved for future use	--
5.9	Reserved for future use	--
5.10	Tool Box	40
5.11	Reserved for future use	--
5.12	Reserved for future use	--
<u>Warranty</u>	43

1.0

Introduction

- 1.1 To obtain optimum benefit from your vacuum fuel bowser unit, it is recommended that all personnel operating it read and understand this manual prior to operation.
- 1.2 Upon receipt of the bowser unit, a visual inspection should be made to determine that it is complete and has not sustained any damage during transportation.

2.0

Safety

2.1 Potential Fire and Explosion

- 2.1.1 Due to the nature of fuel, care should be exercised to eliminate all sparks and open flame in the area of the bowser unit.
- 2.1.2 A 50-foot radius area around the bowser unit for no smoking, sparks or open flames is usually a good practice. It is strongly recommended all local or other regulations be consulted for further restrictions.

CAUTION: The vacuum fuel bowser should never be used inside of an enclosed area. Proper ventilation is required at all times.

2.2 Telescoping Drain

- 2.2.1 Care should be exercised in using the telescoping assembly to prevent injuring fingers between clamps by dropping sections.

2.3 Grounding

- 2.3.1 To eliminate static sparks; the vacuum fuel bowser unit is equipped with two (2)-grounding reels. Connect prior to draining or filling operations as described in the "Operations Section".

2.4 Towing

- 2.4.1 Make sure the tow bar is securely attached to the towing vehicle.
- 2.4.3 Maximum allowable towing speed is 15 MPH.

2.0 Safety (Continued)

2.5 Parking Brake

2.5.1 Parking brake must be applied when filling and draining or when left unattended.

2.6 Air Supply

2.6.1 **CAUTION:** Check the air pressure of supply lines to the vacuum generator to assure it is not in excess of 100 PSI.

2.7 Inspections

2.7.1 Inspections of tires, undercarriage, tow bar, vent, valves, hoses, sight gauge, reflectors, safety labels, etc., should be inspected on a periodic basis. It is recommended these inspections be performed weekly.

2.7.2 Internal inspection will be necessary to insure structural integrity and cleanliness. It is recommended that interval inspections be performed at least every six- (6) months.

CAUTION: When entering confined spaces such as the interior of the bowser tank, care should be taken to provide proper breathing equipment and a separate person dedicated solely to a safety watch of the person inside. It is strongly recommended that all local or other regulations be consulted.

2.8 Manway

2.8.1 Insure the manway cover is provided with a "lock out" devised to prevent accidental closing of the manway while doing internal inspections and to prevent unwanted elements from being introduced to the fuel supply.

2.9 Hoses

2.9.1 Inspect hoses daily prior to usage. The hoses should be extended, as it normally would be for operating. Check for evidence of blistering, carcass saturation or separation, cuts, nicks or abrasions that expose reinforcement materials. Look for slippage, misalignments or leaks at the couplings; if coupling slippage or leaks are found the cause of the problem shall be determined. All defective hoses should be removed from service.

2.10 Reserved for future use

2.10.1 ----

2.0 Safety (Continued)

2.10 Reserved for future use

2.10.2 --

--

--

2.10.3 --

--

2.11 Reserved for future use

2.11.1 --

--

--

--

2.11.2 --

--

--

--

2.12 Vacuum Governor

2.12.1 The vacuum fuel bowser is provided with a pre-adjusted vacuum governor. See Maintenance for adjusting.

3.0 Operations

3.1 Intended Use

3.1.1 The vacuum fuel bowser unit is intended for use in draining and collection of fuel from aircraft or storage area and then transportation to the aircraft, storage area or disposal site. Any other use is prohibited and may void any and all warranties.

3.2 Tow Bar and Undercarriage

3.2.1 The vacuum fuel bowser unit is equipped with steering front wheels controlled by the tow bar.

3.2.2 Care should be taken not to jackknife the bowser when backing up.

3.2.3 Tire inflation should be checked and maintained as described in the "Maintenance Section".

3.0 Operations (continued)

3.2 Tow Bar and Undercarriage (continued)

3.2.4 Before towing, check to see that the grounding reel, air lines and hoses are disconnected, and valves are closed, tow bar is securely attached to the towing vehicle and all manway and covers are closed and latched.

3.2.5 The vacuum fuel bowser unit is equipped with a tow bar latch to hold it in the upright position.

3.3 Parking Brake

3.3.1 The vacuum fuel bowser unit is equipped with a mechanical lever operated parking brake. The brake is applied when the brake handle is in the on position. The brake should be applied when filling, draining tank or whenever left unattended.

3.4 Manway

3.4.1 The vacuum fuel bowser unit is equipped with a quick opening manway assembly for internal inspections.

3.4.2 The manway is equipped with a flip locking cross arm assembly to ensure sealing and securing the cover lid in place.

3.5 Reserved for future use

3.5.1 --
--
--
--

3.6 Sample Port

3.6.1 Not used on this unit

3.7 Grounding

3.7.1 The vacuum fuel bowser unit is supplied with two (2)-grounding reels.

3.0 Operations (Continued)

3.7 Grounding (continued)

3.7.2 Before filling or draining, the grounding reels must be attached between the aircraft or object being serviced and an appropriate ground.

3.8 Drain Valve

3.8.1 The vacuum fuel bowser unit is equipped with a 1-1/2" NPT ball valve with a camlock connector.

3.9 Telescoping Drain Assembly

3.9.1 The vacuum fuel bowser is equipped with a telescoping drain assembly. It is capable of being adjusted to 16ft-0in high.

3.9.2 The telescoping drain assembly, in the fully lowered condition, seals on a stopper assembly, located under the bowser tank and is an integral part of the telescoping drain sump assembly.

3.9.3 The telescoping drain assembly must be in the fully lowered condition before vacuum can be accomplished.

3.9.4 To Raise:

- (1) Loosen top clamp if necessary.
- (2) Grasp top section with one hand and lift as required.
- (3) Tighten clamp securely with the other hand.
- (4) Reposition lifting hand by grasping tube below tightened clamp and lift as required.
- (5) Repeat steps 1-4 until desired height is obtained or assembly is fully extended.

3.9.5 To Lower:

- (1) Tightly grasp bottom extended tube, with one hand loosen the securing clamp.
- (2) Slowly lower tube, hand over hand, until the following clamp is resting on the loosened clamp.
- (3) Repeat steps 1 and 2 until all sections are lowered.

3.9.4 Funnel is equipped with a nitrile rubber seal around the top edge to allow placement against the underside of the wing.

3.9.5 When not in use, telescoping funnel should be collapsed and the cover closed to eliminate contamination.

3.0 Operations (Continued)

3.10 Telescoping Drain Sump

3.10.1 The vacuum fuel bowser unit is equipped with a sump with a removable bottom to allow servicing of the stopper assembly and cleaning.

3.11 Vacuum Assembly

3.11.1 This assembly is equipped with an air powered vacuum generator.

3.11.2 It is intended for vacuum draining or depuddling fuel and condensation. Caution! If other objects such as rock or metallic pieces are vacuumed into the vacuum chamber, they may create a hazard due to sparking.

3.11.3 Vacuum is started by attaching a recommended air supply of 60 CFM at 100 PSI and turning on the air supply valve.

3.11.4 The vacuum assembly is supplied with 50 feet of vacuum hose and a ball valve on the vacuum suction outlet.

3.11.5 The vacuum assembly is equipped with (4) four each ½" NPT opening for use with pencil drains. To use, the pipe caps must be removed and self-closing quick disconnects attached that match local standards. To operate, close vacuum suction valve and turn air supply on and connect drain lines.

3.12 Vacuum Governor

3.12.1 The vacuum governor has been preset at the factory and needs no further adjustments. See "Maintenance" should adjustments or replacement be required.

4.0

Maintenance

4.1 Tow Bar and Under Carriage

4.1.1 The fuel bowser unit is equipped with steering front wheels, controlled by the tow bar and fixed rear wheels.

4.1.2 Maintenance should consist of the following:

- 1) Kingpin bushing, turning bushings and tie rod ends are self-lubricating and need no additional maintenance.
- 2) Inspect wheel bearings at three (3) month intervals. Repack and/ or replace as needed.
- 3) Check tire pressure weekly. Maintain pressure as per tire markings.

4.1.3 Tow bar pivot pin and hook ring should be inspected monthly for excessive wear or cracks.

4.2 Parking Brake

4.2.1 The fuel bowser unit is equipped with a parking brake assembly consisting of a 7" diameter brake drum with 2 ¼" wide brake shoes.

4.2.2 The shoes are activated via a mechanical linkage, eccentric and lever.

4.2.3 The brakes are applied when the brake handle is in the on position. The brakes release when the brake handle is in the off position.

4.2.3 Adjustment may be necessary as the shoes wear.

- 1) Tightening is accomplished by removing the bolt through one yoke and screwing yoke to shorten/lengthen connecting rod as required.
- 2) Do not over tighten or brakes may drag when released.

4.2.4 Brake Shoe Replacement

- 1) Remove wheel.
- 2) Remove nut retaining hub and drum assembly.
- 3) Disconnect actuating rod.
- 4) Remove shoe retainers.
- 5) Install new shoes.
- 6) Replace shoe retainers.
- 7) Adjust actuator rod length.
- 8) Replace wheel.

4.0

Maintenance (continued)

- 4.3 Manway
 - 4.3.1 Inspect manway gasket weekly for cuts, cracks or galling. Replace as needed.

- 4.4 Reserved for future use
 - 4.4.1 --

 - 4.4.2 --

 - 4.4.3 --
 -

 - 4.4.4 --
 -

- 4.5 Reserved for future use
 - 4.5.1 --
 -
 -

- 4.6 Grounding
 - 4.6.1 Grounding reel cables should be pulled out, cleaned and inspected monthly.

 - 4.6.2 Cable clamps and ends should be inspected for loose connections monthly.

- 4.7 Telescoping Drain Assembly
 - 4.7.1 The telescoping drain assembly consists of a 4 ½" stainless steel housing permanently attached to the tank and five (5) aluminum tube sections.

4.0

Maintenance (Continued)

4.7 Telescoping Drain Assembly (continued)

4.7.2 The stainless tube and four (4) largest aluminum sections are equipped with a clamp assembly.

4.7.3 Each aluminum section is crimped on the lower end of the tubing, which acts as a stop to prevent the tube from sliding through the clamp.

4.7.4 Disassembling of the funnel sections are accomplished by rotating the three (3) sections 180 degrees from normal position and gently lifting each section so that the crimped edge on the tube is aligned with the slot on the clamp.

4.8 Telescoping Drain Sump

4.8.1 The fuel bowser is provided with a sump assembly located directly under the telescoping assembly.

4.8.2 Drain the bowser and the sump prior to servicing the stopper assembly.

4.8.3 To service unbolt the twelve (12) flange bolts and slide stopper assembly out. Replace stopper, spring or fastener as required.

4.8.2 Maintenance should consist of inspection and cleaning monthly.

4.9 Vacuum Assembly

4.9.1 The vacuum assembly consists of a vacuum chamber with an air powered vacuum generator mounted on a removable cover. The cover is held in place by three (3) latches.

4.9.2 The vacuum chamber is equipped with a diagonal drain trough to prevent splashing of the fuel into the bowser unit.

4.9.3 The vacuum cover is equipped with an overflow valve which should require no maintenance.

4.9.4 The vacuum generator is attached to the chamber cover. The generator is equipped with an exhaust silencer which should be cleaned at six (6) month intervals or more often depending on the amount of use and conditions.

4.0 Maintenance (Continued)

4.9 Vacuum Assembly (continued)

4.9.5 The vacuum hose should be inspected monthly for cracks. Any sudden loss of vacuum suction power may indicate a crack in the vacuum hose.

4.9.6 The cover gasket should be inspected monthly for deterioration. This gasket should be pliable and free from weather checking.

4.9.7 The overflow stop pivot bolt should not be over tightened. Over tightening will restrict motion of the float.

4.10 Vacuum Governor

4.10.1 The vacuum governor has been preset at the factory and should need no further adjustments.

4.10.2 Should Adjustments be Required:

(1) A ½" nipple on the lid of the vacuum pot is provided for the attachment of a vacuum gauge.

(2) The air supply must be started from 0 pressure and slowly opened while simultaneously adjusting the vacuum governor until you reach the desired operating range.

CAUTION: (2) The governor **must not** be adjusted outside of the designed operating range and to do so may damage the tank and/or the rupture disk may burst. Improper adjustments will nullify the factory warranty.

4.11 Reserved for future use

4.11.1 --

--

4.0 Maintenance (Continued)

4.12 Trouble Shooting

Trouble Shooting



<u>SYMPTOM</u>	<u>PROBABLE CAUSE</u>	<u>PROBABLE CORRECTIONS</u>
Bowser does not track or steer	Bent king pin housing	Replace king pin housing see section 5.2.1 Item #7
	Defective tie rod end	Replace tie rod end See section 5.2.1 Item #12
	Loose or worn out bushings	Replace as needed see section 5.2.1 item #11 #16 or #18
Tow bar does not stay in the up-right position	Broken or stretched spring	Replace as needed see section 5.2.1 item #26
Parking brake does not work	Need adjustment or repairing	Adjust or replace as per instructions. See section 4.2 and 5.2.3-B

5.0 Replacement Parts

This section provides information for identification of parts for ordering. To Order, it is important to have the Model Number, Subassembly Number, Part Number and Description. Parts may be ordered by calling or writing to:

Spokane Industries, Inc.
 Spokane Metal Products Division
 P.O. Box 3303
 Spokane, WA 99220-3303
 Telephone: (509) 928-0720
 Tele Fax: (509) 927-0826
 Email: dyorke@spokaneindustries.com


CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT

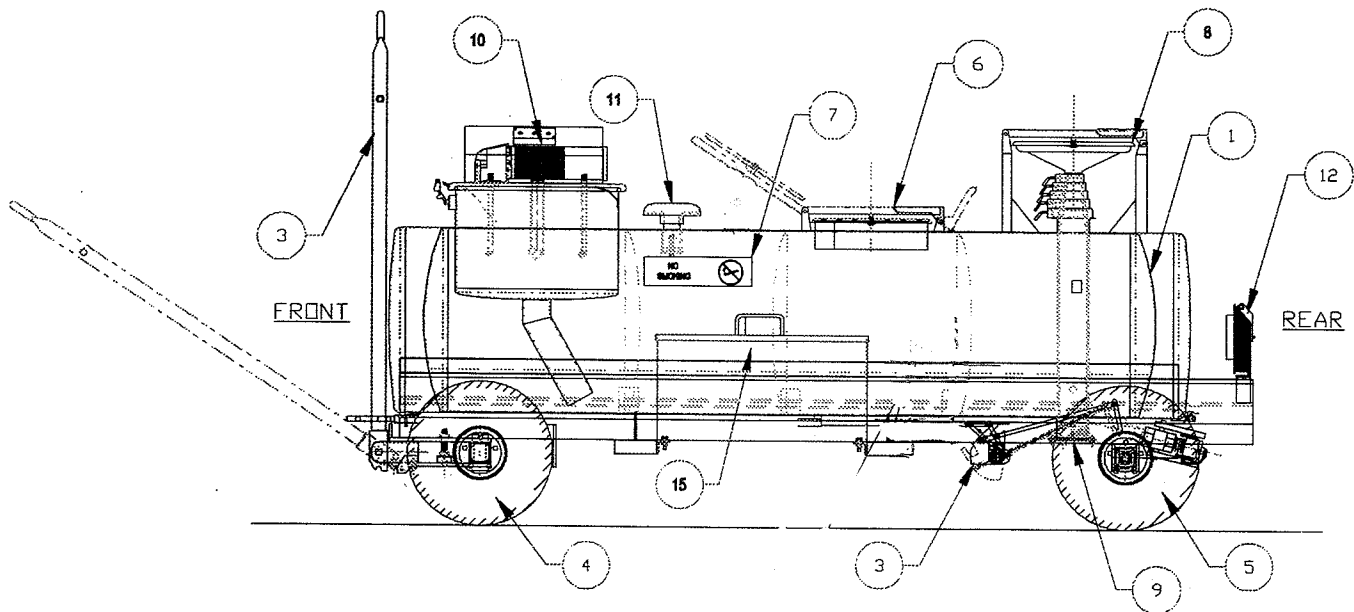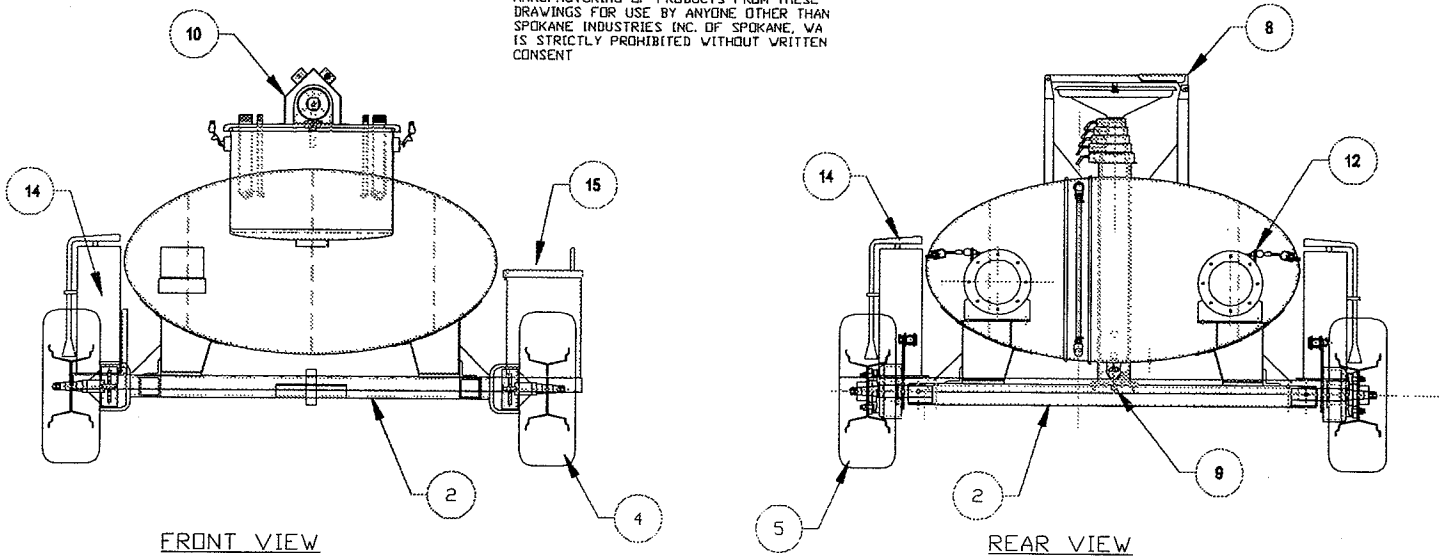

ITEM No.	ASSEMBLY	SECTION
1	Main Tank	5.1
2	Axle Front	5.2.1
2	Axle Rear	5.2.2
3	Parking Brake	5.2.3
4	Wheel Assembly, Front	5.2.4
5	Wheel Assembly, Rear	5.2.5
6	Manway	5.3
7	Decal Package	5.4
8	Telescoping Drain Assembly	5.5
9	Telescoping Drain Sump W/ Stopper	5.5.1
10	Vacuum Assembly	5.6
11	Vacuum Governer	5.6.1
12	Miscellaneous Fixtures	5.7
13		5.8
14		5.9
15	Tool Box	5.10

CONFIDENTIAL-PROPRIETARY INFORMATION
REPRODUCTION OF THESE DRAWINGS OR THE
MANUFACTURING OF PRODUCTS FROM THESE
DRAWINGS FOR USE BY ANYONE OTHER THAN
SPOKANE INDUSTRIES INC. OF SPOKANE, WA
IS STRICTLY PROHIBITED WITHOUT WRITTEN
CONSENT


SECTION 5.1

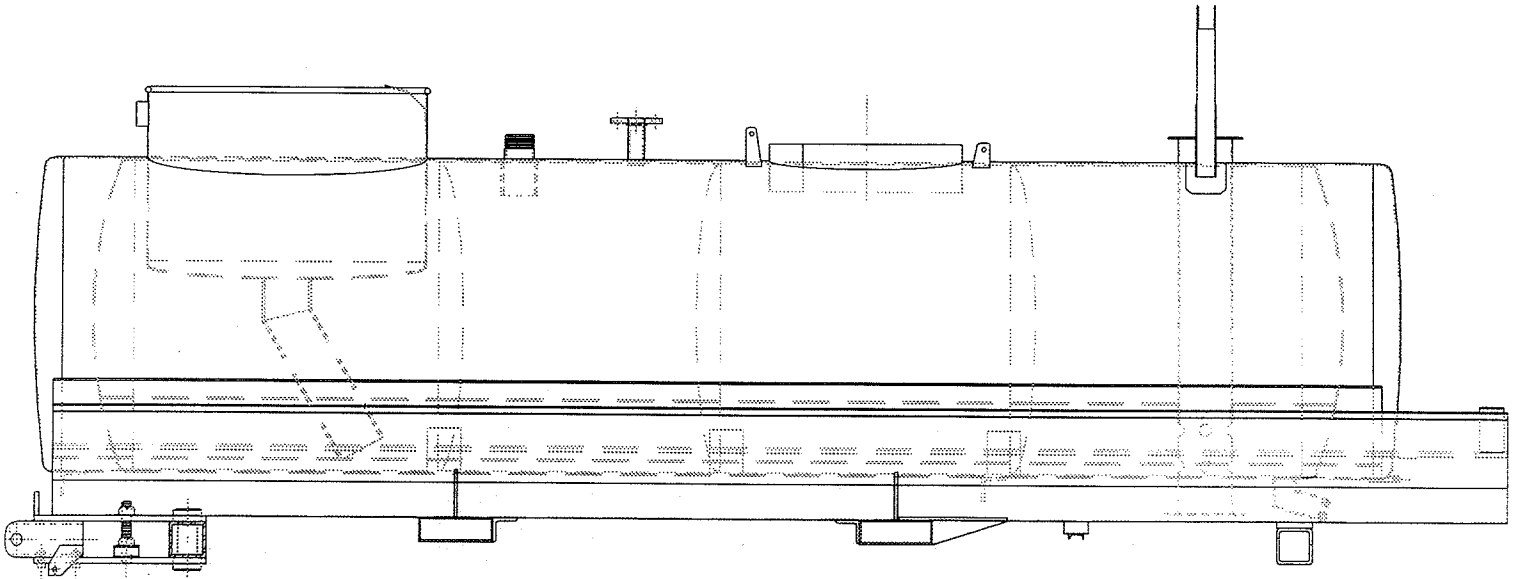

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
-	1	17372	1	Stainless Steel Tank Weldment, 00 Gallon Capacity BOW	1050#

CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT

SECTION 5.2.1

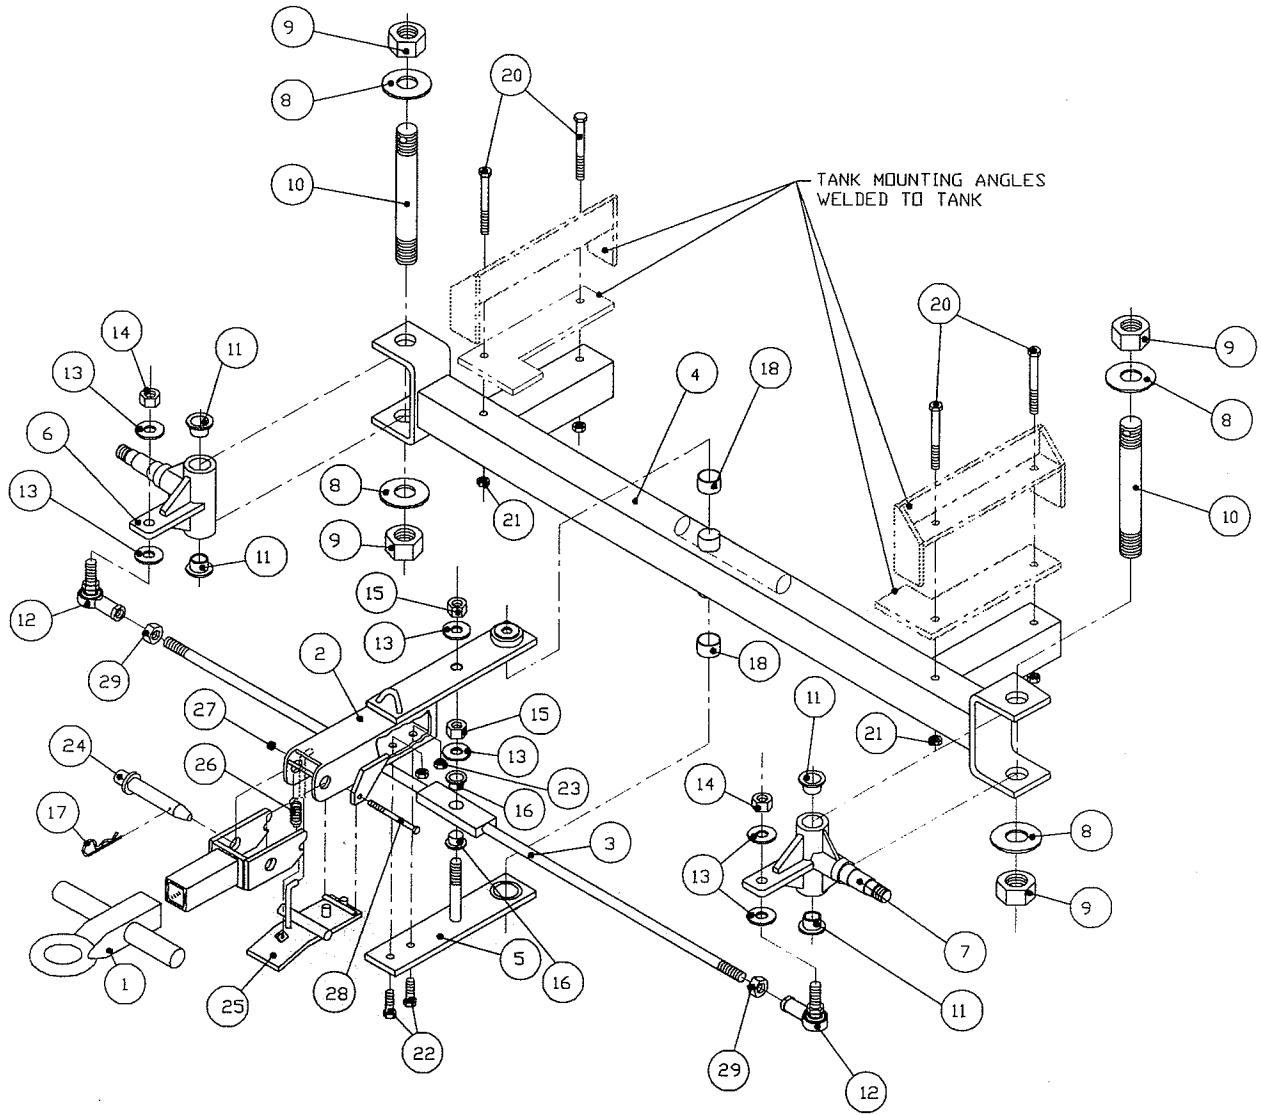

ASSEMBLY No. 08-1018
 MAJOR ASSEMBLY- AXLE ASSEMBLY


Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
08-1018	-	-	1	Axle, Assembly, Front	175#
-	1	07-1103	1	Tow Bar	23
-	2	07-1104	1	Arm, Turning	16
-	3	07-1005	1	Tie Rod	8.6
-	4	07-11071	1	Axle, Front	63.3

ASSEMBLY No. 08-1018
 MAJOR ASSEMBLY- AXLE ASSEMBLY (CONTINUED)

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
	5	07-1016	1	Steering Arm, Lower Plate	6.7
07-1009	6	05-1009	1	Sleeve, King Pin, Right	12
07-1009	7	05-1009	1	Sleeve, King Pin, Left	12
	8	02-11131	4	Washer, King Pin	.7
	9	02-12131	4	Nut, King Pin	2
	10	05-1010	2	King Pin	11
	11	03-1013	4	Bushing, King Pin Sleeve	1
	12	03-1016	2	Ends, Tie Rod	5
	13	02-11072	5	Washers, Tie Rod	.4
	14	02-12071	2	Nuts, Tie Rod Ends	.6
	15	02-12071	2	Nut, Tie Rod Pivot	.6
	16	03-1015	2	Bushing, Tie Rod Pivot	.8
	17	02-1300	2	Cotter Pin	.2
	18	03-1014	2	Bushing, Axle Pivot	1
	19	-	-	-	-
	20	02-1503	4	Bolts, Tank Mounting	1.3
	21	02-12041	4	Nuts, Tank Mounting	.8
	22	02-1502	2	Bolts, Turning Arm Clamp	.3
	23	02-12041	2	Nuts, Turning Arm Clamp	.4
	24	02-1304	1	Hitch Pin	2
	25	07-1020	1	Toe Latch	3.7
	26	04-1054	1	Sprint, Toe Latch	.5
	27	02-12012	1	Nut, Toe Latch	.6
	28	02-1501	1	Bolt, Toe Latch	.2
	29	02-12141	2	Hex Nut, Tie Rod	.6

CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT

SECTION 5.2.2

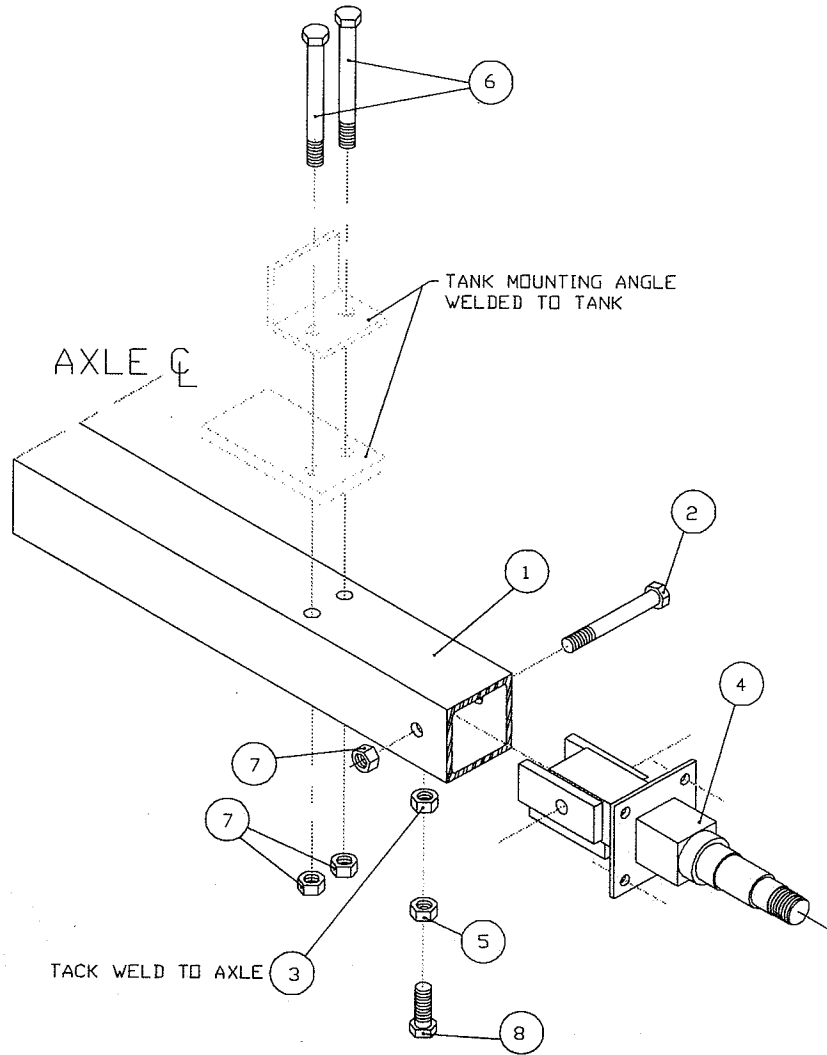


ASSEMBLY No. 08-10102
 MAJOR ASSEMBLY- AXLE ASSEMBLY

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
08-10102	-	-	1	Axle, Assembly, Rear	72#
-	1	05-1023	1	Axle,Rear	41.9
-	2	02-1505	2	Bolts, Mounting Spindle	2
-	3	02-12035	2	Nuts, Mounting Spindle	1
-	4	07-1010	2	Spindle, Rear	20
-	5	02-1203	2	Nut, Mounting Spindle	1
-	6	02-1503	4	Bolt, Mounting Angles	2
-	7	02-1204	6	Nuts, Mounting	3
-	8	02-10041	2	Bolt, Mounting Spindle	1.5


SECTION 5.2.3


CONFIDENTIAL-PROPRIETARY INFORMATION
REPRODUCTION OF THESE DRAWINGS OR THE MANUFACTURING OF PRODUCTS FROM THESE
DRAWINGS FOR USE BY ANYONE OTHER THAN SPOKANE INDUSTRIES INC. OF SPOKANE, WA
IS STRICTLY PROHIBITED WITHOUT WRITTEN CONSENT

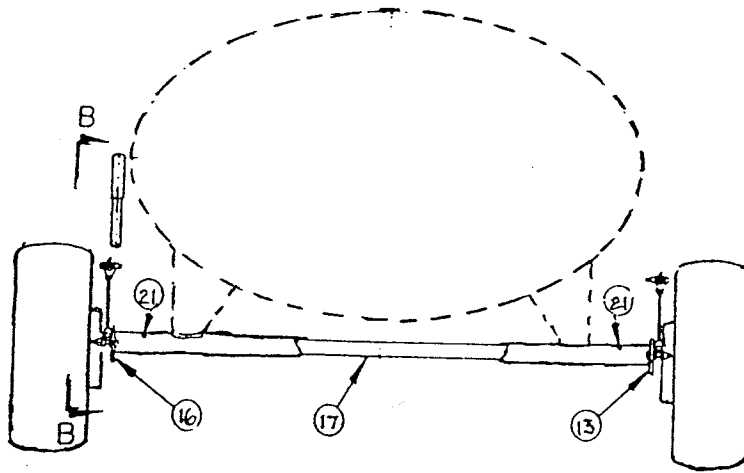


REAR VIEW

NTS

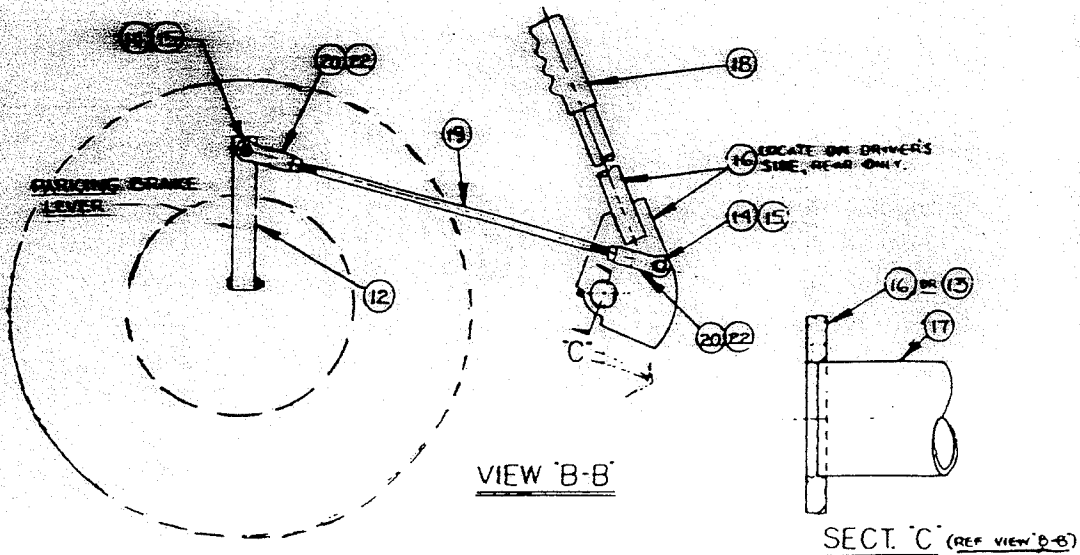


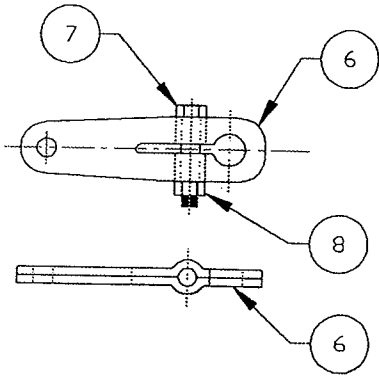


CAM LEVER OPERATOR DETAIL

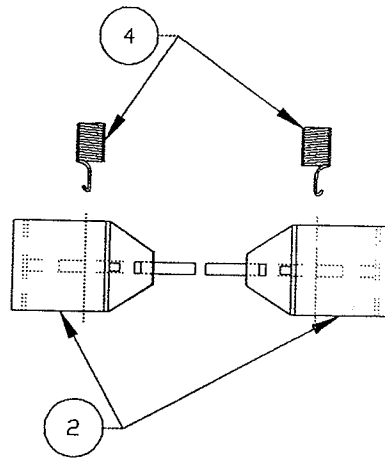


BRAKE SHOE / HOLD DOWN SPRING DETAIL

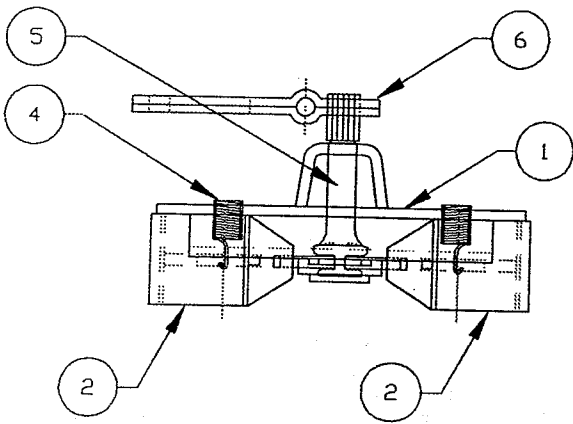


BRAKE/CAM/LEVER/BACKING PLATE ASSY.

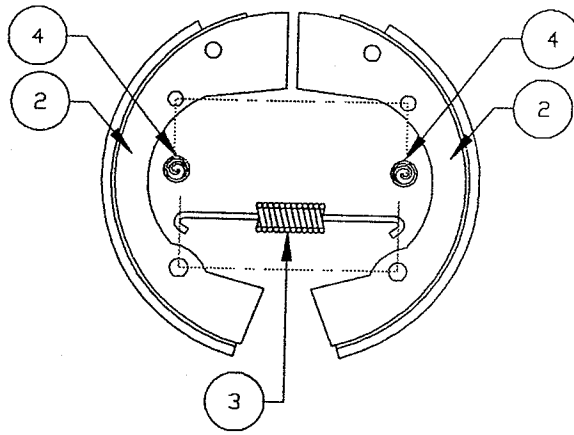

BRAKE SHOE / SPRING ORIENTATION
RETURN SPRING

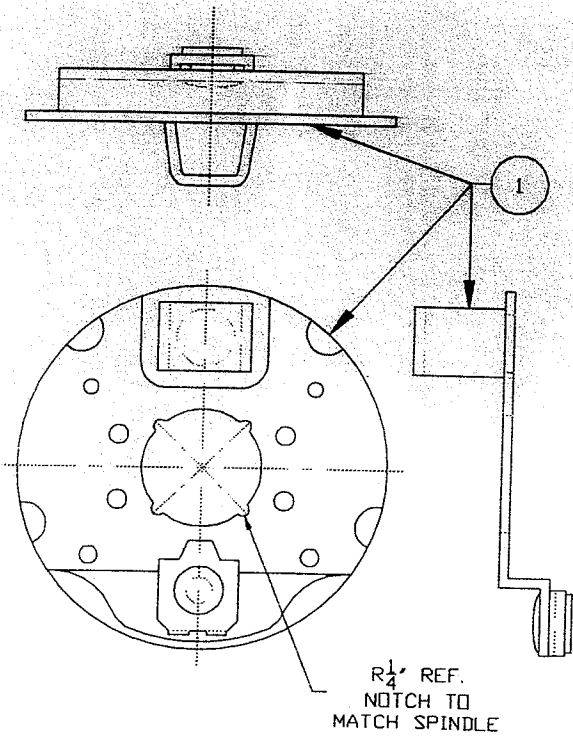

BACKING PLATE DETAIL

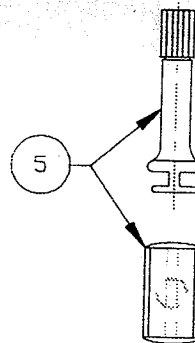

CAM DETAIL

SECTION 5.2.3



CONFIDENTIAL-PROPRIETARY INFORMATION
REPRODUCTION OF THESE DRAWINGS OR THE MANUFACTURING OF PRODUCTS FROM THESE
DRAWINGS FOR USE BY ANYONE OTHER THAN SPOKANE INDUSTRIES INC. OF SPOKANE, WA
IS STRICTLY PROHIBITED WITHOUT WRITTEN CONSENT

ASSEMBLY No. 10-100030R
MAJOR ASSEMBLY - BRAKE, PARKING

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #
08-1007R		04-1063		Brake Assembly (2 Req.)	4.4
	1	04-1064R	1	Backing Plate Assembly	1.4
	2	04-1065R	2	Brake Shoe Assembly	1.6
	3	04-10265R	1	Return Spring	.04
	4	04-1026R	2	Hold Down Spring	.06
	5	04-1028R	1	Cam	.5
	6	04-1030R	1	Cam Lever	.7
	7	02-10017R	1	Cam Bolt	.07
	8	02-12012	1	Cam Nut	.03
	9				
	10				
	11				
	12				
08-1008				Brake Linkage Assembly	14.8
	13	05-1025	1	Cam, Brake Linkage	1.4
	14	02-10012	1	Bolt	.4
	15	02-12021	1	Nut	.1
	16	07-1033	1	Brake Handle, Fab'd Sub Assy	5.4
	17	01-8104	1	Brake Handle, Connector	4
	18	04-1055	1	Grip, Vinyl	1
	19	05-1026	1	Rod, Brake Linkage	1
	20	04-2516	4	Yoke Ends	.5
	21	03-1020	2	Grease Fitting	.5
	22	02-100231	4	Jam Nut	.5

CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT.

SECTION 5.2.4

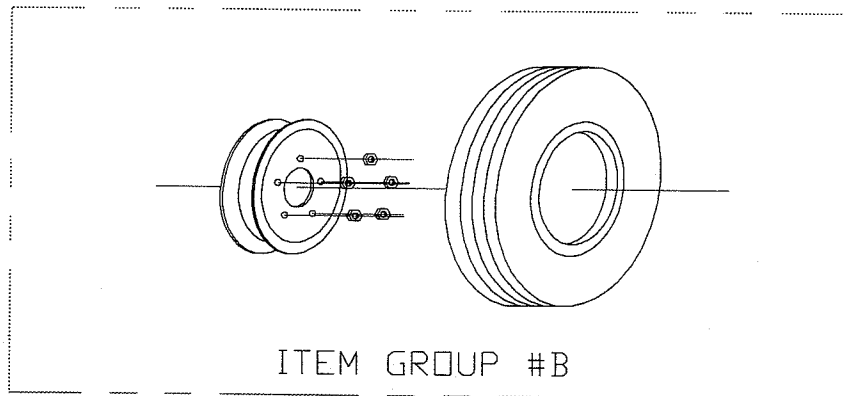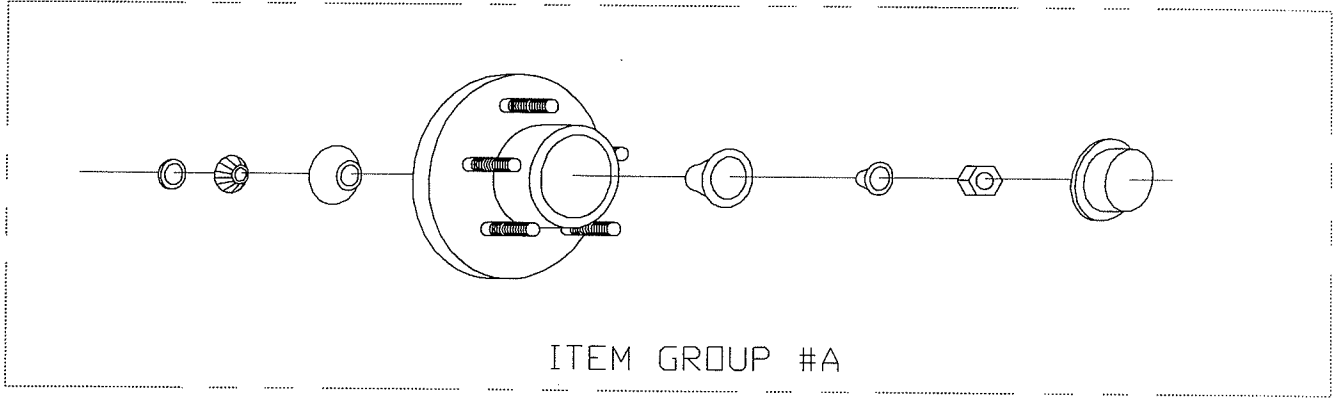


ASSEMBLY No. 10-100042
 MAJOR ASSEMBLY- FRONT WHEEL

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
10-100042	-	-	2	FRONT WHEEL ASSEMBLY	116#
-	A	08-1011	1	Bearing And Hub Assembly, Front	23
-	B	08-10061	1	Tire/Wheel/Tube Assembly	35

CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT

SECTION 5.2.4-A

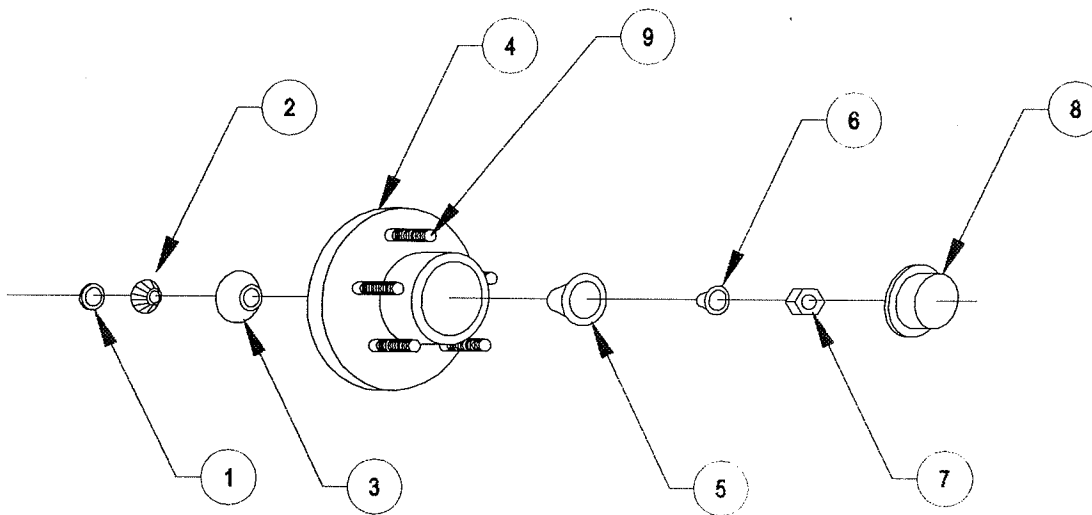


ASSEMBLY No. 08-1011
 MAJOR ASSEMBLY- FRONT WHEEL

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
08-1011		04-1050	1	Bearing and Hub Assembly, Front	23#
	1	04-1012	1	Seal, Bearing	1
	2	04-1013	1	Bearing, Inner	3
	3	04-1015	1	Cup, Inner	2
	4	04-1017	1	Hub, Wheel	7
	5	04-1016	1	Cup, Outer	4
	6	04-1014	1	Bearing, Outer	3
	7	02-1205	1	Nut, Spindle	1
	8	04-1019	1	Cap, Dust	1
	9	02-1017	5	Studs, Hub	1

CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT

SECTION 5.2.4-B


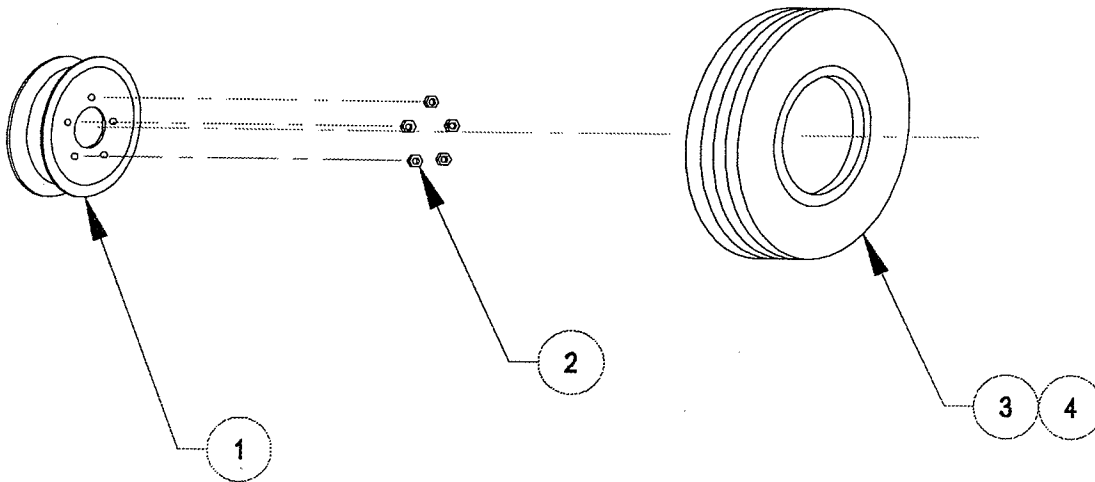


ASSEMBLY No. 08-10061
 MAJOR ASSEMBLY- FRONT WHEEL

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
08-10061	-	-	1	Tire/Wheel/Tube Assembly	35#
-	1	04-1020	1	Wheel, Split Rim	19
-	2	04-1021	5	Nuts, Lug	1
-	3	04-10221	1	Tire	4
-	4	04-1045	1	Tube	11

CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT

SECTION 5.2.5

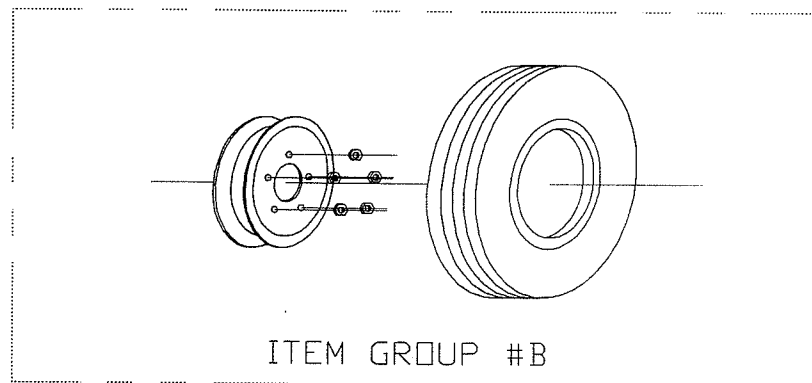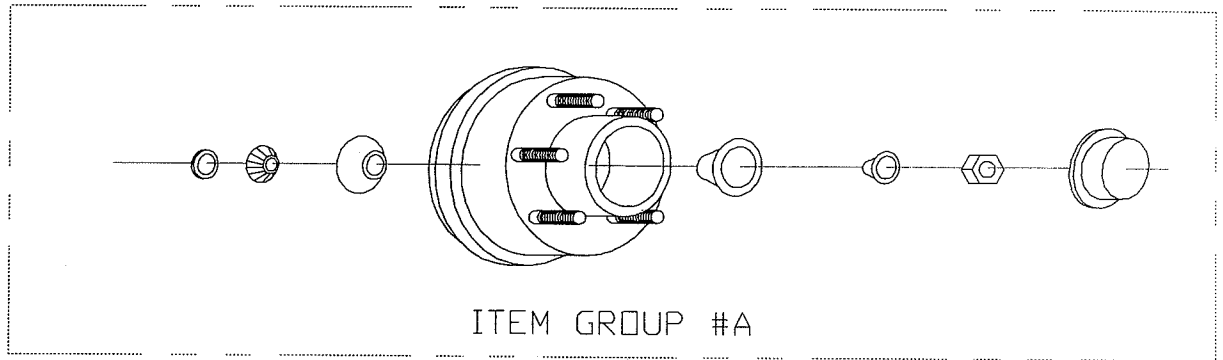


ASSEMBLY No. 10-100052
 MAJOR ASSEMBLY- REAR WHEEL

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
10-100052	-	-	2	REAR WHEEL ASSEMBLY	136.3#
-	A	08-10111	1	Bearing And Hub Assembly, Front	32.6
-	B	08-10061	1	Tire/Wheel/Tube Assembly	35

CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT

SECTION 5.2.5-A

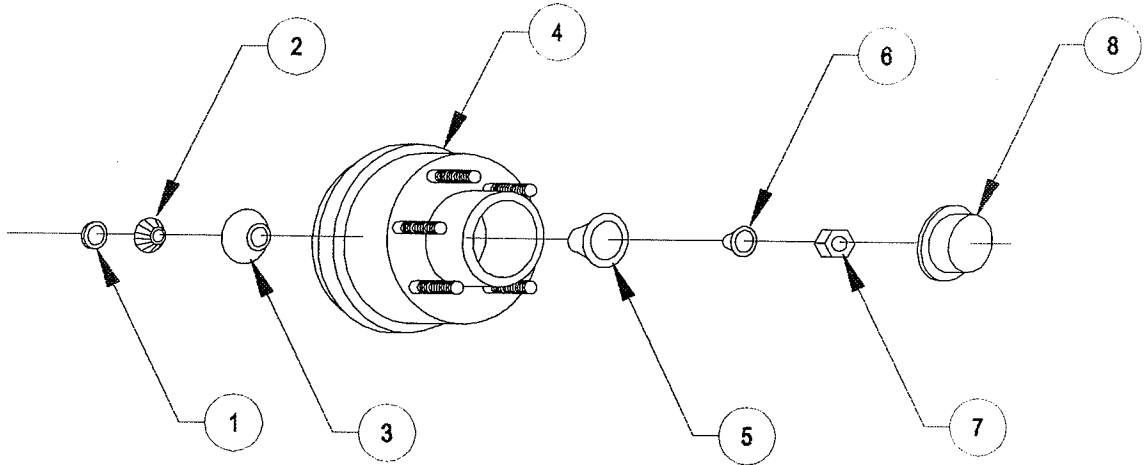


ASSEMBLY No. 08-10111
 MAJOR ASSEMBLY- REAR WHEEL

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
08-10111			1	Bearing and Hub Assembly, Rear	32.6#
04-1062			1	Bearing and Hub Assembly, Rear	32.6
	1	04-1012	1	Seal, Bearing	1
	2	04-1013	1	Bearing, Inner	3
	3	04-1015	1	Cup, Inner	2
	4	05-1008	1	Hub And Brake Drum Sub-Assembly	17.6
		05-1021	1	Brake Drum (04-1051)	6.3
		05-1020	1	Hub, 5-Hole (04-1017)	9.0
		02-1017	5	Studs, Hub	2.3
	5	04-1016	1	Cup, Outer	4
	6	04-1014	1	Bearing, Outer	3
	7	02-1205	1	Nut, Spindle	1
	8	04-1019	1	Cap, Dust	1


CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT

SECTION 5.2.5-B

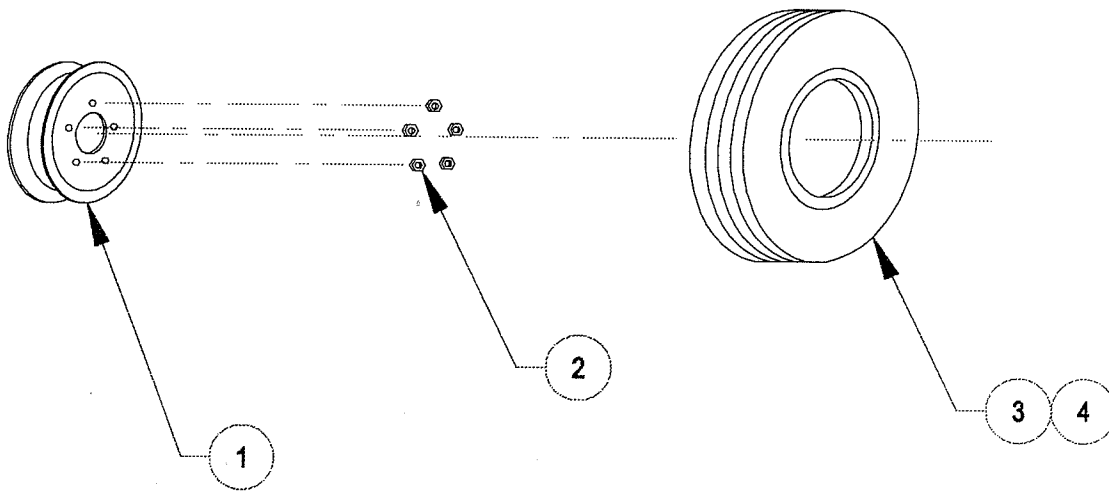

ASSEMBLY No. 08-10061
 MAJOR ASSEMBLY- FRONT WHEEL

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
08-10061	-	-	1	Tire/Wheel/Tube Assembly	35#
-	1	04-1020	1	Wheel, Split Rim	19
-	2	04-1021	5	Nuts, Lug	1
-	3	04-10221	1	Tire	4
-	4	04-1045	1	Tube	11

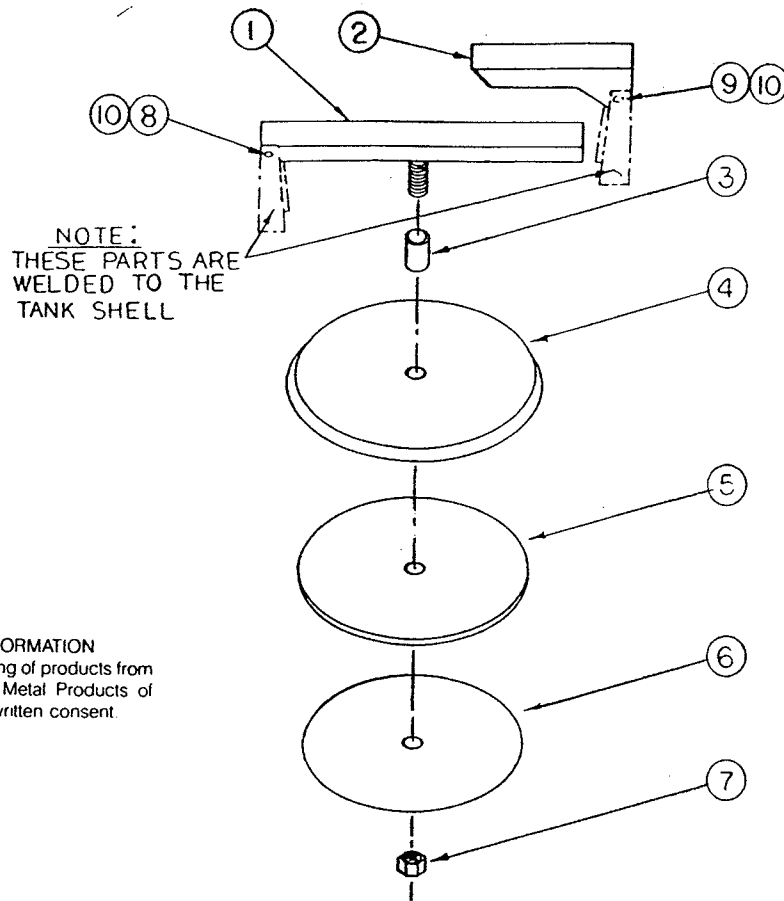




CONFIDENTIAL PROPRIETARY INFORMATION
 Reproduction of this data or the manufacturing of products from
 this data by anyone other than Spokane Metal Products of
 Spokane, WA is strictly prohibited without written consent

ASSEMBLY NO. 10-100060

MAJOR ASSEMBLY - MANWAY ASSEMBLY

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #
08-1025				Manway Cover Assembly	
	1	07-1039S	1	19-1/2" Cross Arm Sub-Assy	2.5
	2	01-8222S	1	7" Cross Arm	4
	3	01-93455S	1	Spacer	.5
	4	01-86001	1	Cover	5
	5	06-25025	1	Gasket	1
	6	07-2303	1	Gasket Retainer	2
	7	02-1206	1	Nut	.5
	8	02-10013	1	Bolt	1
	9	02-10014	1	Bolt	1
	10	02-1202	2	Nut	.5

CONFIDENTIAL PROPRIETARY INFORMATION
Reproduction of this data or the manufacturing of products from
this data by anyone other than Spokane Metal Products of
Spokane, WA is strictly prohibited without written consent

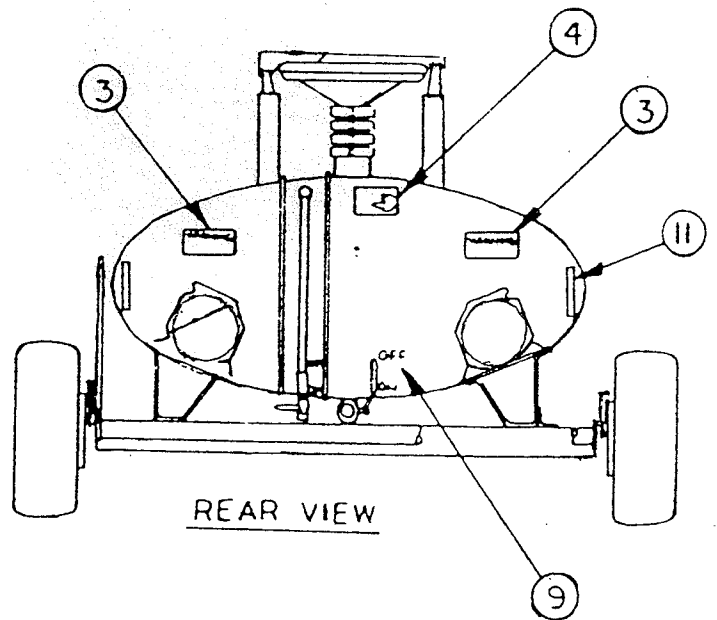
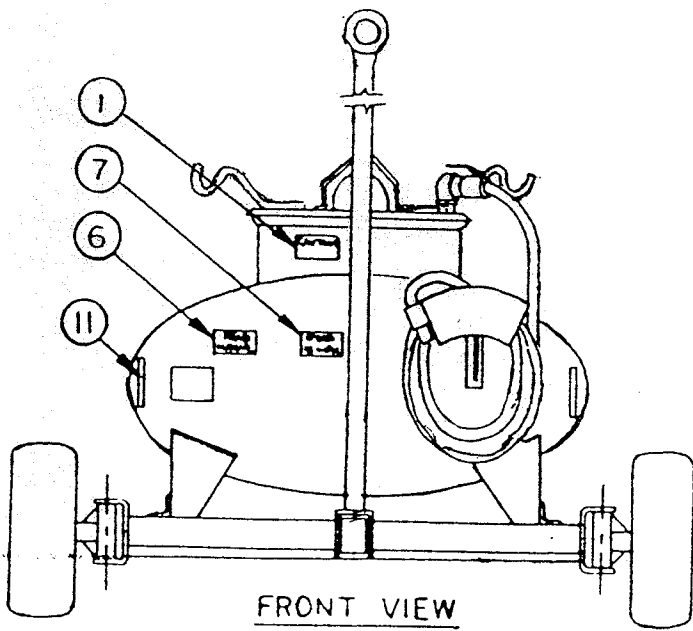
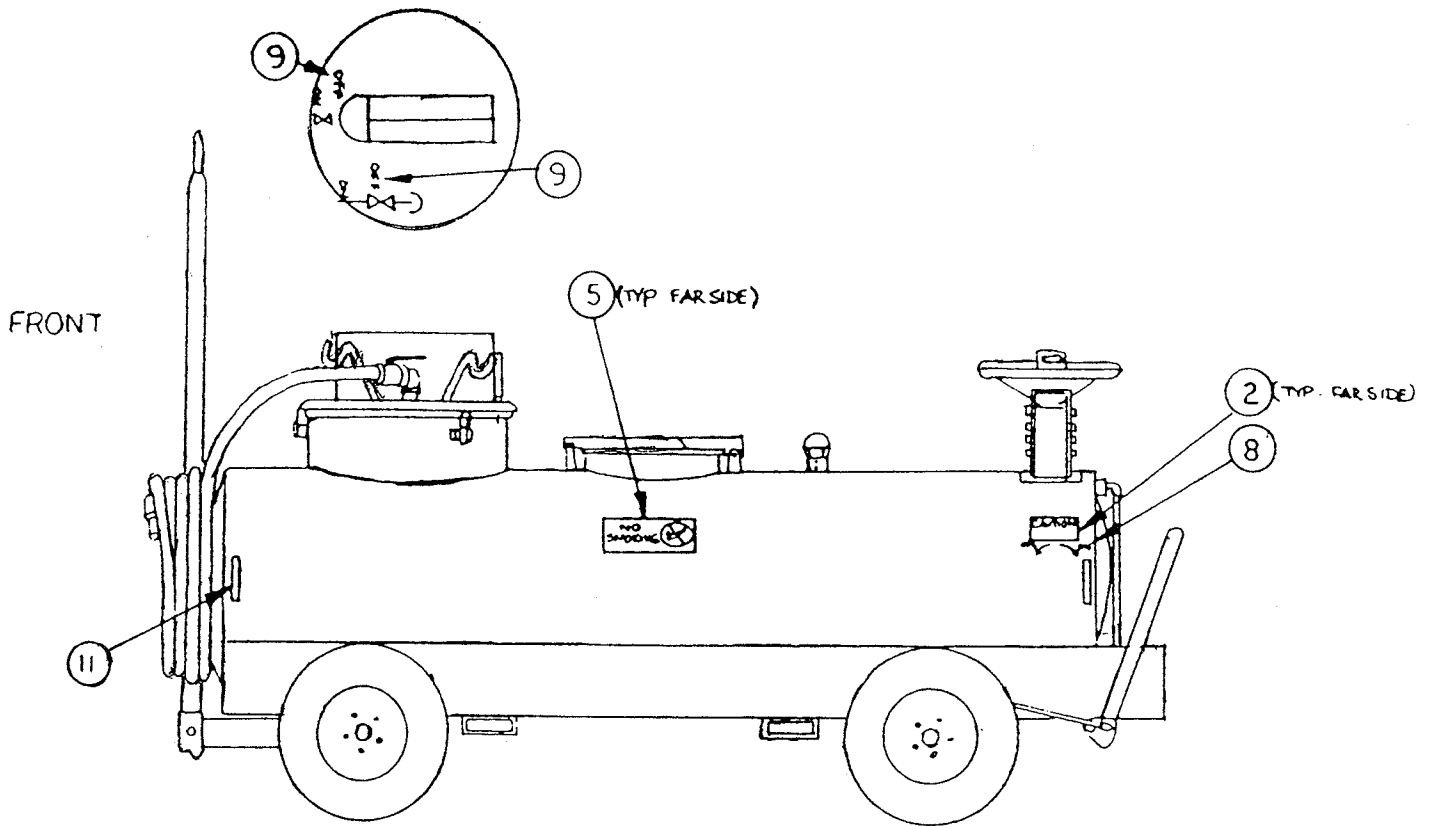


ASSEMBLY NO 10-100070
 MAJOR ASSEMBLY - DECAL PACKAGE

Sub Assy.	Item	Part No.	Quantity	Description	Wt.#
10-100070				Decal Assembly	.1
	1	06-1002	1	Caution, Vacuum System	.1
	2	06-1003	1	Caution, Parking Brake	.1
	3	06-1004	2	Warning, Grounding Reels	.1
	4	06-1005	1	Warning, Telescoping Drain	.1
	5	06-1006	2	Danger, No Smoking	.2
	6	06-1007	1	Notice, Read Manual	.1
	7	06-1008	1	Maximum Towing Speed 15MPH	.1
	8	06-1010	1	Off/On, Parking Brake	.1
	9	06-1011	8	Off/On, Drain Valve	.8
	11		8	Reflector Tape	.8

CONFIDENTIAL-PROPRIETARY INFORMATION
REPRODUCTION OF THESE DRAWINGS OR THE
MANUFACTURING OF PRODUCTS FROM THESE
DRAWINGS FOR USE BY ANYONE OTHER THAN
SPOKANE INDUSTRIES INC. OF SPOKANE, WA
IS STRICTLY PROHIBITED WITHOUT WRITTEN
CONSENT

SECTION 5.5

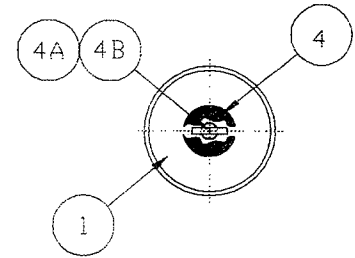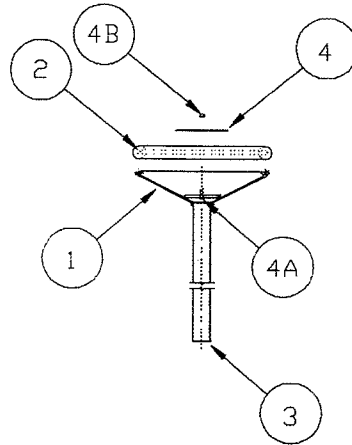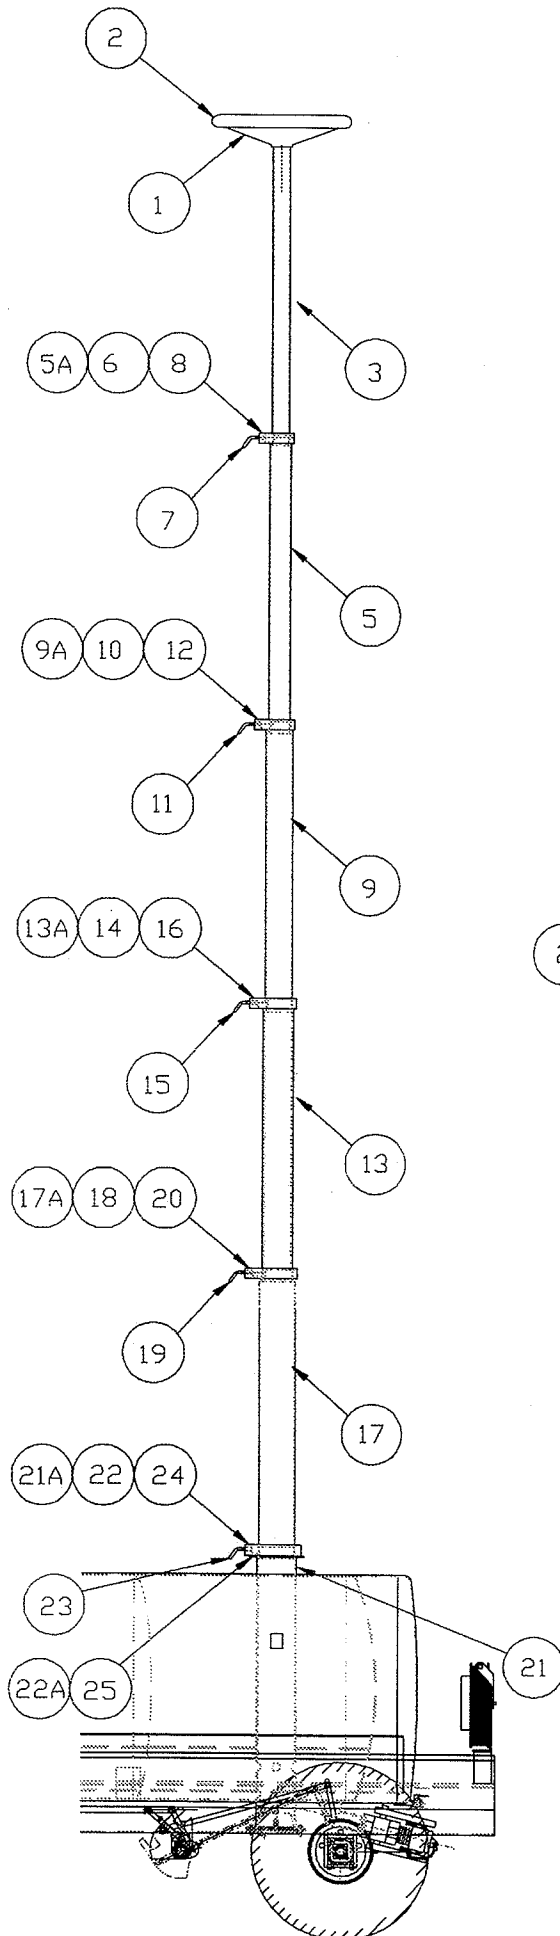


REAR

ASSEMBLY No. 08-1034USP
MAJOR ASSEMBLY- TELESCOPING DRAIN

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
08-1034U			1	TELESCOPING DRAIN ASSEMBLY	30#
08-1016U		07-10541	1	Funnel Section Assembly	
	1	01-8250	1	Funnel, Cast	2.4
	2	06-1022T	1	Gasket	.2
	3	01-92402	1	Tubing, 2"OD	3.5
	4	04-1039	1	Screen	.1
	4A	02-10002	1	Bolt, Carriage	.2
	4B	02-1200	1	Nut, Nylon Lock	.1
08-1017U			1	2 1/2" Section Assembly	
	5A	05-10271	1	Clamp(Clamps 08-1016U Assy)	2.1
	5	01-9242	1	Tubing, 2 1/2"OD	1.1
	6	05-10051	1	Wedge For 05-10271 Clamp	.3
	7	05-10181	1	Handle, Clamp	.3
	8	02-1005	1	Screw, Set (For Wedge)	.1
08-1027U			1	3" Section Assembly	
	9A	05-10281	1	Clamp(Clamps 08-1017U Assy)	2.3
	9	01-92452	1	Tubing, 3"OD	1.4
	10	05-10021	1	Wedge for 05-10281 Clamp	.3
	11	05-10181	1	Handle, Clamp	.3
	12	02-1005	1	Screw, Set (For Wedge)	.1
08-1028U			1	3 1/2" Section Assembly	
	13A	05-10291	1	Clamp(Clamps 08-1027U Assy)	2.6
	13	01-9248	1	Tubing, 3 1/2"OD	1.6
	14	05-10031	1	Wedge For 05-10291 Clamp	.3
	15	05-10181	1	Handle, Clamp	.3
	16	02-1005	1	Screw, Set (For Wedge)	.1
07-1014USP			1	4" Section Assembly	
	17A	05-10301	1	Clamp(Clamps 08-1028U Assy)	2.7
	17	01-9259	1	Tubing, 4"OD	1.1
	18	05-10041	1	Wedge For 05-10301 Clamp	.3
	19	05-10181	1	Handle, Clamp	.3
	20	02-1005	1	Screw, Set (For Wedge)	.1
07-1041USP			1	4 1/2" Section Assembly	
	21A	05-10302	1	Base Clamp(Clamps 07-1014USP Assy)	6.5
	21	01-92565S	1	Tubing, 4 1/2"OD	3.7
	22A	04-10561	1	Flange, Base	.5
	22	05-10051	1	Wedge For 05-10301 Clamp	.3
	23	05-10181	1	Handle, Clamp	.3
	24	02-1005	1	Screw, Set (For Wedge)	.1
	25	02-100121	4	Bolts, Mounting	.1

CONFIDENTIAL-PROPRIETARY INFORMATION
 REPRODUCTION OF THESE DRAWINGS OR THE
 MANUFACTURING OF PRODUCTS FROM THESE
 DRAWINGS FOR USE BY ANYONE OTHER THAN
 SPOKANE INDUSTRIES INC. OF SPOKANE, WA
 IS STRICTLY PROHIBITED WITHOUT WRITTEN
 CONSENT

SECTION 5.5.1

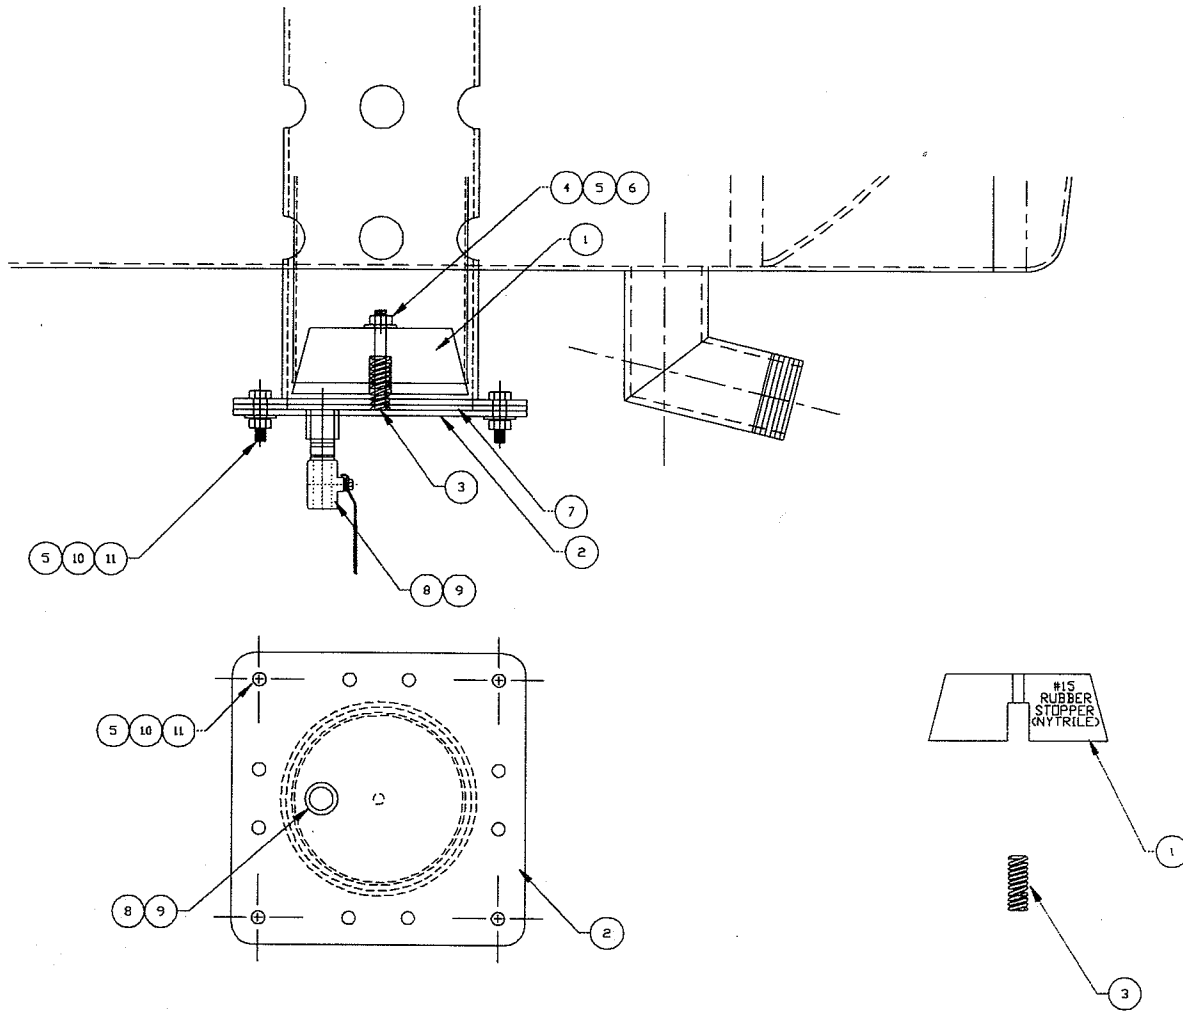

MATING FLANGE AND ASSEMBLY DETAILS

STOPPER AND SPRING DETAILS

ASSEMBLY No. SMP-15575SP
 MAJOR ASSEMBLY- TELESCOPING DRAIN SUMP W/ STOPPER

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
SMP-15575SP			1	Telescoping Drain Sump W/ Stopper Assembly	6.6
	1	15575SP1	1	#15 Stopper	1.0
	2	01-9005S	1	Flange, Mating	2.0
	3	15575SP2	1	Spring, S-810	.1
	4	02-10004	1	Bolt, 1/4'-unc x 2 1/2'lg	.2
	5	02-12140	13	Nut, 1/4'-unc Hex	.1
	6	02-1102	1	Washer, 1/4' Flat	.1
	7	06-2506	1	Gasket	.2
	8	03-0170S	1	Nipple, 1/4' Close	.2
	9	04-2506	1	Valve, 1/4' Ball	.3
	10	02-1100	12	Bolt, 1/4'-unc x 1' Lg	2.1
	11	02-11001	12	Washer, Lock	.3


ASSEMBLY No. 08-0002USP
 MAJOR ASSEMBLY- VACUUM SYSTEM

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
08-0002USP			1	VACUUM SYSTEM ASSEMBLY	170#
-	1	08-0002USP-1	1	Screen, Welded Assembly	13
-	2	08-0002USP-2	1	Bolt, Shoulder	.1
-	3	08-0002USP-3	1	Nut, Washered Wing	.1
	4	06-10162	50ft	Hose, Jet Fuel Bonded and Certified	25
	5	-	-	-	-
	6A	-	-	-	-
	6B	-	-	-	-
08-1001			1	Overflow Stop Assembly	
	7	07-1001	1	Float Assembly	4
	8	04-1001	1	Gasket	.1
	9	02-10003	1	Bolt	.1
	10	02-1200	1	Nut, Nylon Lock	.1
	11	02-1102	1	Washer, Flat	.1
08-1002	12		1	Cover Assembly	29.6
06-1022V	13		1	Gasket	3.5
08-1003			1	Vacuum Generator Assembly	
	14	04-1004	1	Housing, Exhaust	9.5
	15	04-1005	1	Silencer	4.7
	16	04-1006	1	Venturi	2.2
	17A	04-1007	1	Jet, Air	2.7
	17B	03-11135	1	Reducer, Air Jet	.1
	18	04-1008	1	Box, Venturi	2.7
	19A	04-1032	1	Valve, Ball	5.8
	19B	03-0264S	1	Nipple	.2
	20	04-1056	1	Coupler, Air Twist	.7
	21	04-1010	1	Gasket	.1
	22	02-10010	3	Bolt	.1
	23	02-11002	3	Washer, Lock	.1
08-1004			1	Assessoris	
	24	03-1001	1	Elbow, 90°	2
	25	03-02922S	1	Nipple	.5
	26	04-10321	1	Valve, Ball	3
	27	03-1002	1	Bushing	.2
	28	-	-	-	-
	29	-	-	-	-
	30	-	-	-	-

ASSEMBLY No. 08-0002USP
 MAJOR ASSEMBLY- VACUUM SYSTEM

	31	03-1021	3	Cap, Pipe	1
	32	-	-	-	-
	33A	07-1034W	1	Cover, Vacuum Generator	11
	33B	-	-	-	-
	34	02-10010	6	Bolt	.1
	35	06-25123	6	Washer, Flat	.1
	36	02-1100	6	Washer, Flat	.1
	37	02-1200	6	Nut, Nylon Insert	.1
	38	04-1057	1	Coupler, Air Twist	.1
	39	02-10004	1	Bolt	.1
	40	02-1200	1	Nut	.1
	41	02-100115	6	Bolt	1
	42	02-1202	6	Nut	.5
	43	07-1075	2	Hanger, Hose	3
	44	08-0002USP-44	3	Hose, Jet Fuel Bonded And Certified	12
	45	04-2507	3	Valve, Ball	6
	46	08-0002USP-46	3	Bushing	3.1
08-1009			1	Vacuum Tank Fabricated Assembly	
	47	07-1032	1	Tank Assembly	65
	48	04-1062	1	Fastener, Hood	1.1
07-10341	49		1	Valve, Vacuum Check Assembly	2.5


SECTION 5.6.1

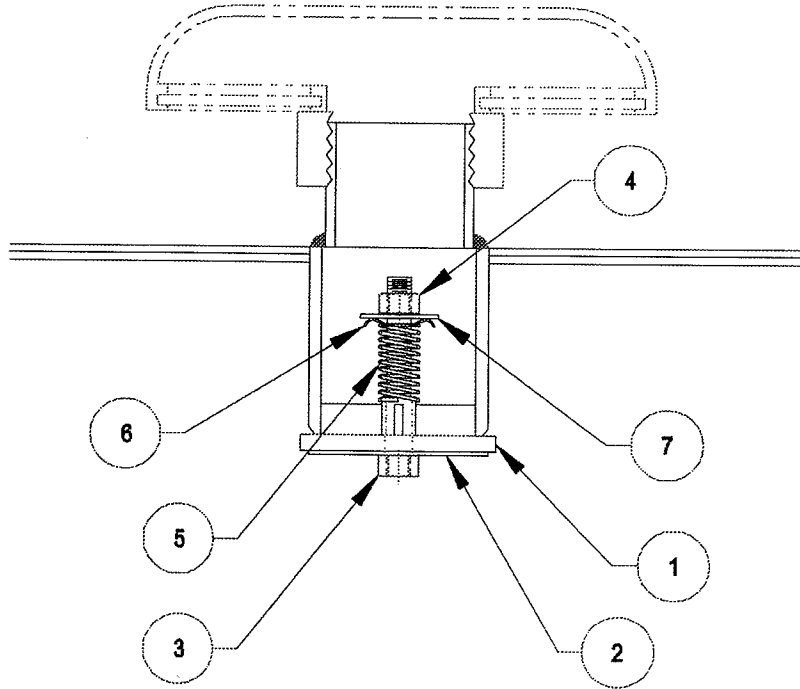

ASSEMBLY No. SMP15575GOV
 MAJOR ASSEMBLY- VACUUM GOVERNOR

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
SMP15575GOV			1	Vacuum Govenor Assembly	
	1	15575GOV-1	1	Gasket	.3
	2	01-903S	1	Washer, Flat	.1
	3	02-10013	1	Bolt	.2
	4	02-12014	1	Nut	.1
	5	15575GOV-5	1	Spring, Century J-38	.1
	6	15575GOV-6	1	Washer, Cup 92922A036	.1
	7	15575GOV-7	1	Washer, Flat 91090A121	.1

SECTION 5.10


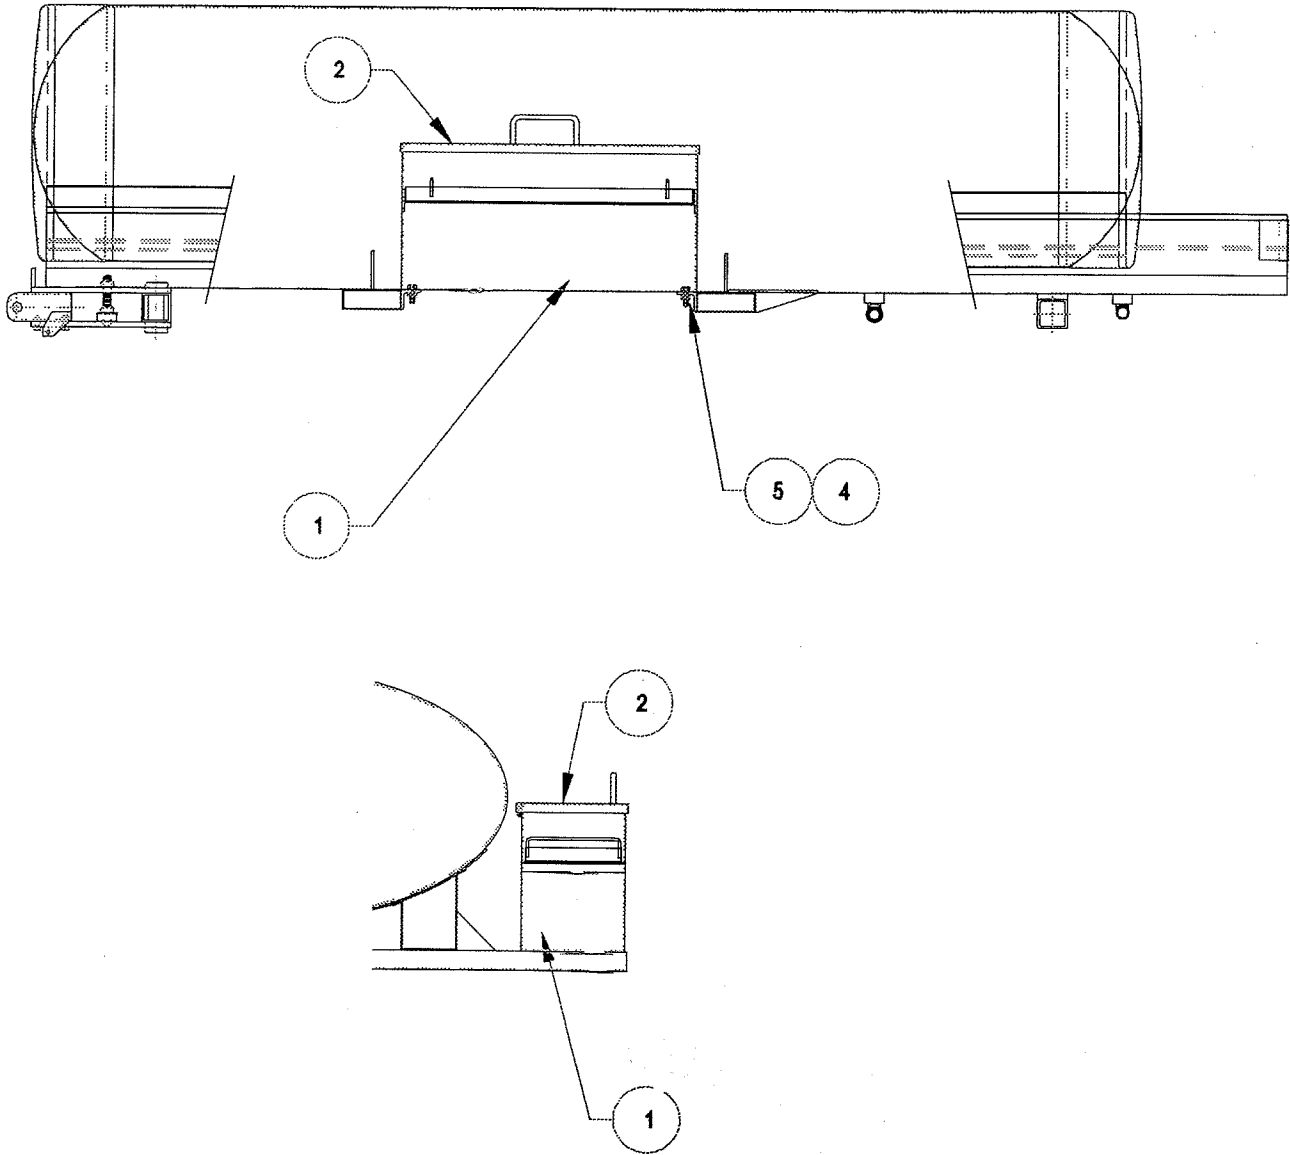


MAJOR ASSEMBLY- TOOL BOX

Sub Assy.	Item	Part No.	Quantity	Description	Wt. #'s
SMP			1	Tool Box Assembly	
	1		1	Tool Box	18
	2		1	Lid	6
	3				8
	4	02-10013	1	Bolt	.6
	5	02-12014	1	Nut	.4

SECTION 5.7

CONFIDENTIAL PROPRIETARY INFORMATION
Reproduction of this data or the manufacturing of products from
this data by anyone other than Spokane Metal Products of
Spokane, WA is strictly prohibited without written consent

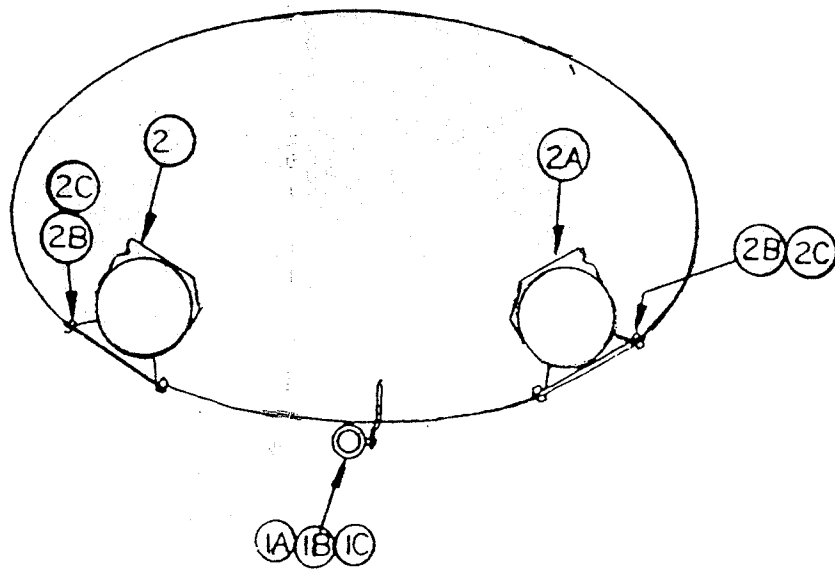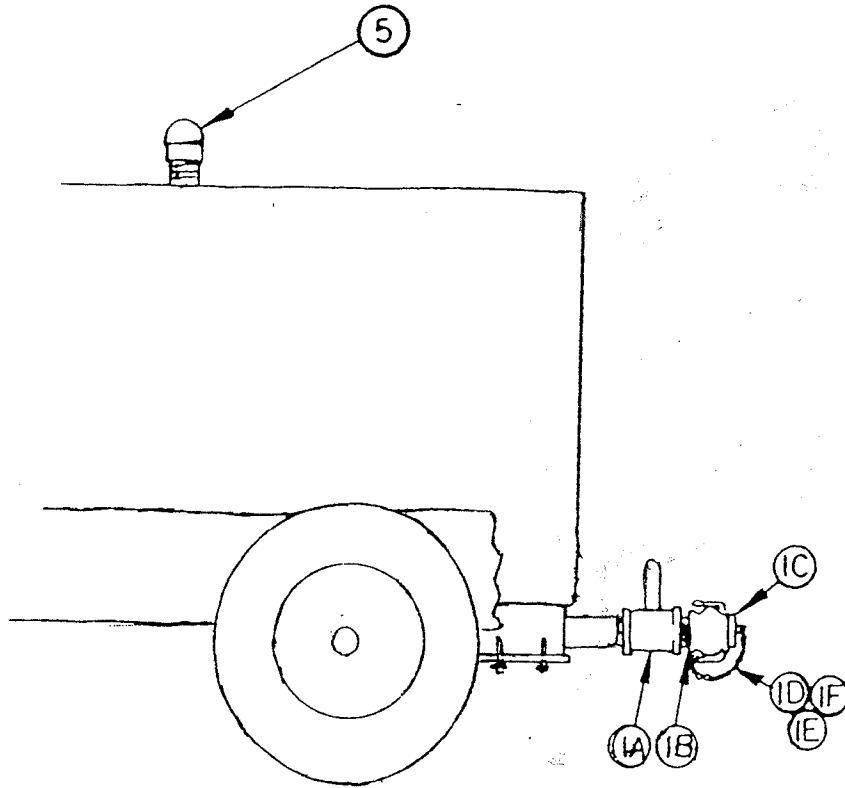

REAR VIEW

SPOKANE INDUSTRIES, INC.

SPOKANE METAL PRODUCTS DIVISION

Spokane Washington

500 GALLON VACUUM FUEL BOWSER **ONE YEAR LIMITED WARRANTY**

Seller warrants its "400 Gallon Vacuum Fuel Bowser" to be free from defects in material and workmanship under the normal use and service for which the unit is intended if, but only if the unit has been properly operated, maintained and stored in accordance with printed directions contained in the product manual. Our obligation under this warranty shall be limited to the repair or exchange of equipment and parts which may prove defective within one year of the date the unit is put into service but shall in no event extend beyond a date two years from the date the unit is shipped from our plant. All transportation charges on parts returned to us for replacement under this warranty must be returned pre-paid.

This warranty does not extend to damages caused by environmental factors varying from normal design conditions, whether natural or man-made, or to units subjected to misuse, negligence or accident. This warranty likewise does not extend to the unit or any parts thereof which have been repaired or altered improperly or in any way so as to effect adversely its stability or reliability. This warranty does not cover parts or labor required to repair or replace parts whose usefulness is exhausted due to normal operation of this unit.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE NOT SET FORTH IN A WRITING SIGNED BY AN AUTHORIZED REPRESENTATIVE OR SELLER. SELLER SHALL IN NO EVENT BE LIABLE FOR ANY CONSEQUENTIAL LOSS OR DAMAGE RESULTING FROM THE USE OR LOSS OF USE OF THIS UNIT.